

550W

High power PERC solar module - Tier1


SKU: 11606

Output power

1st Year ≥ 98.00%	12th Year ≥ 91.95%	25th Year ≥ 84.80%
-----------------------------	------------------------------	------------------------------

12-year product materials and workmanship quality warranty

ENGINEERING DRAWING

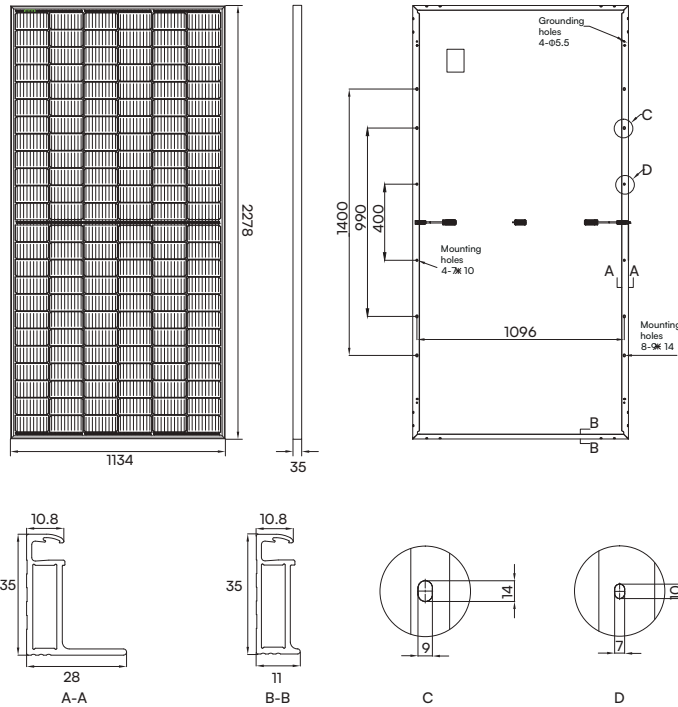

MECHANICAL PARAMETERS

Cell (mm)	182*91 PERC
Dimensions (L*W*H) (mm)	2278*1134*35
Weight (kg)	27.2
Cable Cross Section Size (mm ²)	4
No. of Cells & Connections	144(6*24)
No. of Diodes	3
Frame	Anodized Aluminium Alloy
Glass Thickness (mm)	3.2

QUALIFICATION

Temperature Cycling Range (°C)	-40~+85
Max. Series Fuse Rating (A)	25
Max.Wind Load/Max.Snow Load (Pa)	2400/5400
Hot Spot Rate	100% Free
Fire Rating	Class C
Junction Box & Connector Protection Grade	IP68

TEMPERATURE COEFFICIENTS


Nominal Module Operating Temperature (NMOT)	43±2°C
Temperature Coefficient Voltage (Voc)	-0.29 %/°C
Temperature Coefficient Current (Isc)	0.04 %/°C
Temperature Coefficient Power (Pm)	-0.34 %/°C

ELECTRICAL PARAMETERS

STC AM1.5 1000W/m ² Cell Temperature 25°C	Max. Power at STC (Pmpp/W)	550
	Output Tolerance (W)	0-+5
	Max. Power Voltage (Vmp/V)	41.98
	Max. Power Current (Imp/A)	13.12
	Open Circuit Voltage (Voc/V)	49.97
	Short Circuit Current (Isc/A)	13.93
	Module Efficiency (%)	21.29
NMOT AM1.5 800W/m ² Ambient Temperature 20°C Wind Speed 1m/s	Max. Power (Pmpp/W)	416.1
	Max. Power Voltage (Vmp/V)	39.64
	Max. Power Current (Imp/A)	10.50
	Open Circuit Voltage (Voc/V)	47.17
	Short Circuit Current (Isc/A)	11.22

*Measurement tolerance Pmax:±3%, Voc:±3%; Isc: ±5%.

I-V CURVE (550W)



PACKING CONFIGURATION

Pieces Per Pallet	31
Pallets Per Container	20
Pieces Per Container	620

Default

Optional

Connector Type	<input type="checkbox"/> MC4Compatible	<input type="checkbox"/> MC4
Cable Length	<input type="checkbox"/> 400mm/300mm	<input type="checkbox"/> Customized
Frame Color	<input type="checkbox"/> Silver	<input type="checkbox"/> Black
Max. System Voltage	<input type="checkbox"/> 1500V	<input type="checkbox"/> 1000V